


BW-2 Part Industrial Cable Gland

Technical Specification



Size :	20mm to 90 mm & ¾" to 3"
Standard :	BS 6121 :Part-1 : 2005 ,EN 50262 :1999
Function :	Provides mechanical cable retention & electrical continuity via armoured wire termination in indoor area. it is easy to install.
Ingress Protection:	IP2X EN 60529
Material:	Brass BS 2874
Thread:	Metric,NPT
Operating Temp:	-80°C to +300°C
Cable Type:	SWA Cable
Features:	Two part Armour Lock
Accessories:	Shroud,Earth Tag,Galvanized Steel,Lock Nut and Serrated Washer
Packing:	Gland Kit for 20mm to 32 mm contain 2 Brass Cable Gland,2 Galvanized Steel Lock Nut,2 Brass Earth Tag and 2 PVC Shroud. For Sizes 40mm and above each kit includes one of each component.

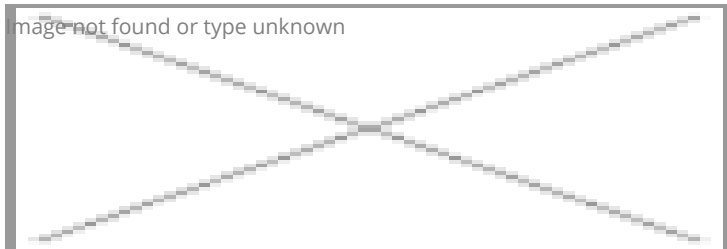

Table

Size	Thread "C"		Thread Length "D"	Cable Dia. "A" Max.	Cable Dia. "B" Max.	Armour Wire Dia.	Across Flat	Across Corners	CAT NO.
	Metric	NPT							
20S	20	¾"	10.00	11.50	15.50	0.9-1.25	21.25	23.25	MCBW20S
20	20	¾"	10.00	14.00	20.00	1.25-1.60	23.85	27.25	MCBW20

25	25	1"	10.00	20.50	26.00	1.6-2.00	34.00	37.00	MCBW25
32	32	1"	15.00	27.00	33.90	1.6-2.00	40.50	45.50	MCBW32
40	40	1½"	15.00	33.00	41.50	2.0-2.50	48.00	54.50	MCBW40
50S	50	2"	15.00	38.50	47.00	2.0-2.50	55.00	60.00	MCBW50S
50	50	2"	15.00	44.00	52.00	2.50	63.00	71.0	MCBW50
63S	63	2"	15.00	51.00	59.20	2.50	70.50	75.50	MCBW63S
63	63	2½"	15.00	56.80	65.50	2.50	75.00	84.50	MCBW63
75S	75	2½"	15.00	63.00	74.00	2.5-3.15	85.00	90.00	MCBW75S
75	75	3"	15.00	68.50	79.50	3.15	92.25	102.50	MCBW75
82	82	3"	15.00	74.30	84.40	3.15	95.00	105.00	MCBW82
90	90	3½"	15.00	82.00	91.00	3.15	99.00	110.00	MCBW90