


CW 3-Part Industrial Cable Gland



Size :	1 16mm to 1 15mm & ½" to 3"
Standard :	BS 6121 :Part-1 : 2005 ,EN 50262 :1999
Function :	Provides mechanical seal on the SWA cable outer sheath.Also provides mechanical cable retention electrical continuity via armoured wire termination in indoor outdoor area.
Ingress Protection:	IP66
Material:	Brass BS 2874
Operating Temp:	-60°C to +130°C
Cable Type:	SWA Cable
Features:	Universal anyway clamping ring
Accessories:	PVC Shroud,Earth Tag,Lock Nut,Serrated Washer and Entry Thread Seal
Packing:	Gland Kit Contain 1 Brass Cable Gland,1 Brass Lock Nut,1 Brass Earth Tag and 2 PVC Shroud.

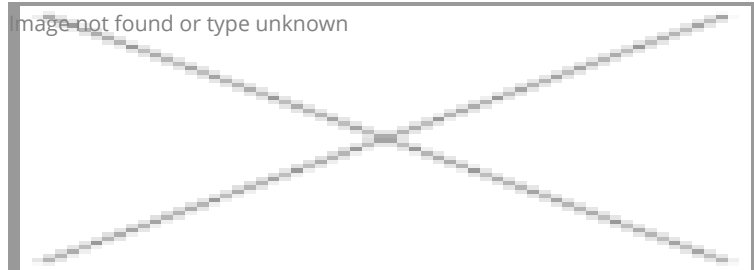

TABLE

Size	Thread "C"		Thread Length "D"	Cable Dia. "A" Max.	Cable Dia. "B"		Armour Wire Dia.	Across Flat	Across Corners	CAT NO.
	Metric	NPT			Min.	Max.				
16	16	-	10	8.60	6.10	12.00	0.90	20.00	23.00	MCCW3-16
20S	20	½"	10	11.80	9.50	16.20	0.9-1.25	24.00	27.00	MCCW3-20S
20	20	½"	10	14.00	13.00	20.25	0.90-1.25	27.70	31.00	MCCW3-20

25	25	1 1/4"	10	20.30	18.00	26.00	1.20-1.60	35.00	39.00	MCCW3-25
32	32	1"	10	26.50	23.00	33.70	1.60-2.00	43.00	47.50	MCCW3-32
40	40	1 1/4"	13	33.20	28.00	40.10	1.60-2.00	51.50	57.00	MCBW40
50S	50	1 1/2"	13	40.00	34.50	45.75	2.0-2.50	58.50	65.00	MCCW3-50S
50	50	2"	13	44.00	39.60	53.10	2.00-2.50	66.00	73.00	MCCW3-50
63S	63	2"	14	50.00	44.00	59.40	2.50	72.00	80.00	MCCW3-63S
63	63	2 1/2"	14	56.00	54.50	65.00	2.50	80.00	89.00	MCCW3-63
75S	75	2 1/2"	15	62.00	59.00	71.40	2.50	86.50	97.00	MCCW3-75S
75	75	3"	15	69.50	66.70	78.00	2.50	94.00	105.00	MCCW3-75
90	90	3"	20	80.00	76.20	89.25	2.50-3.15	106.00	118.70	MCCW3-90
100	100	3 1/2"	20	91.00	86.00	102.00	3.15-4.0	123.00	133.00	MCCW3-100
110	110	-	20	100.00	101.00	110.50	3.15-4.0	134.00	144.00	MCCW3-110
115	115	-	20	102.00	101.50	110.50	3.15-4.0	134.00	144.00	MCCW3-115