

DC Medium Duty Cable Glands




Technical Specification	
Material :	Brass (IS-319) Standard (Al. / S.S. / M.S. also available)
Plating :	Nickle Plated Standard (Chrome also available)
Entry Threads :	BSC Standard (Metric / NPT also available)
Sealing Rubber Ring :	Natural

Application

Used in normal climatic condition for armoured & unarmoured cables.

Fitting Sequence:

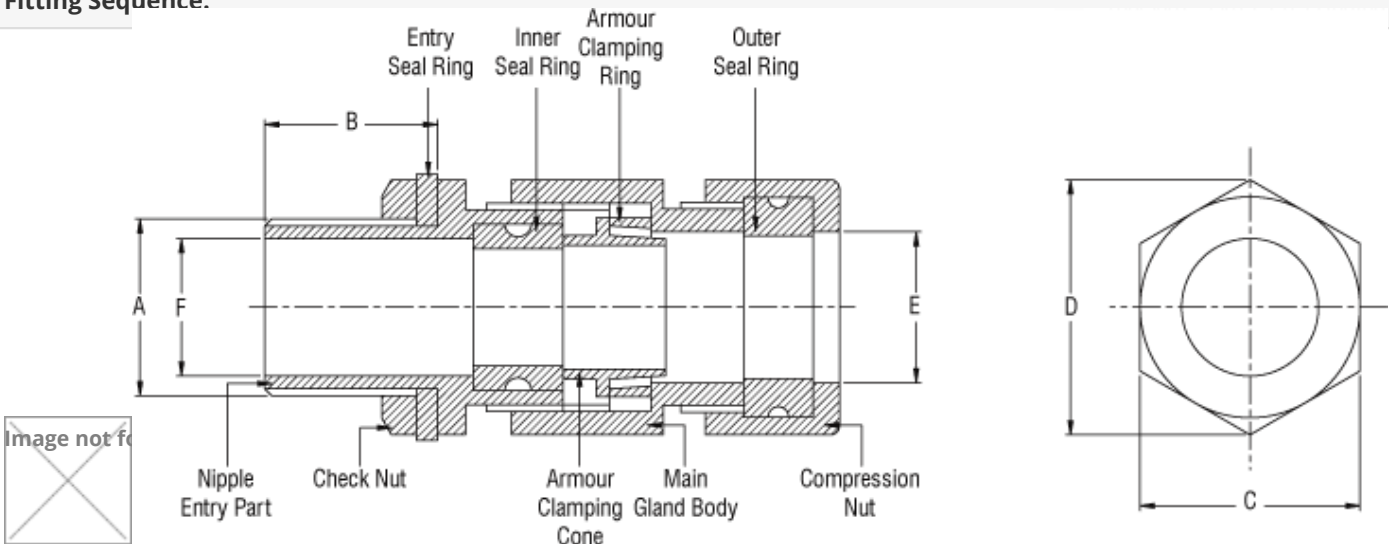

Table

Suitable Cable Overall Dia		Size		A Nipple Entry	B Length	C(A/F)	D(A/C)	E Dia	F Dia.
From	To	mm	Inches	inches	mm	mm	± mm	± mm	± mm
6.0	9.0	10	3/8"	5/8"	25.0	20.5	23.5	10.0	7.0
9.0	12.0	12	1/2"	5/8"	25.0	22.5	26.0	16.5	11.0

12.0	16.0	16	5/8"	3/4"	25.0	22.5	26.0	16.5	14.0
16.0	18.0	19	3/4"	3/4"	25.0	25.5	29.5	19.0	15.0
18.0	20.0	22	7/8"	7/8"	25.0	28.0	32.0	20.0	15.0
20.0	23.0	25	1"	1"	25.0	31.0	35.5	23.5	20.0
23.0	26.0	28	1 1/8"	1 1/8"	25.0	35.5	41.0	27.0	23.0
26.0	30.0	32	1 1/4"	1 1/4"	25.0	41.0	47.0	32.0	25.5
30.0	33.0	35	1 3/8"	1 1/2"	25.0	44.0	50.5	35.0	30.0
33.0	37.0	38	1 1/2"	1 1/2"	25.0	47.0	54.0	38.0	31.5
37.0	43.0	45	1 3/4"	2"	25.0	57.0	65.5	47.0	43.0
43.0	48.0	50	2"	2"	25.0	59.0	68.0	51.0	43.0
48.0	54.0	57	2 1/4"	2 1/4"	25.0	66.0	75.0	57.0	50.0
54.0	61.0	63	2 1/2"	2 1/2"	25.0	77.0	89.0	65.0	57.0
61.0	67.0	70	2 3/4"	2 3/4"	25.0	82.0	95.0	72.0	63.0
67.0	73.0	75	3"	3"	25.0	90.0	105.0	75.0	65.0
73.0	78.0	82	3 1/4"	3 1/4"	25.0	94.0	108.0	83.0	74.5
78.0	84.0	88	3 1/2"	3 1/2"	25.0	103.0	119.0	91.0	79.0
84.0	94.0	100	4"	4"	25.0	113.0	130.0	98.0	91.0

Tolerance + 1mm